


Any works being started prior to consulting **PUDLO** may result in the works being excluded from the 30 year warranty.


N.B - Post drilled service penetrations are not acceptable in swimming pool construction.

1 No. 20mm dia. min. continuous bead of Surestop SM to be applied around the circumference of service pipe at a min of 75mm cover from the face of the liner wall. Surestop BWB to be pushed in to Surestop SM.

1 No. 20mm dia. min. continuous bead of Surestop SM to be applied around the circumference of the post-drilled hole with-in the **PUDLO** wall.

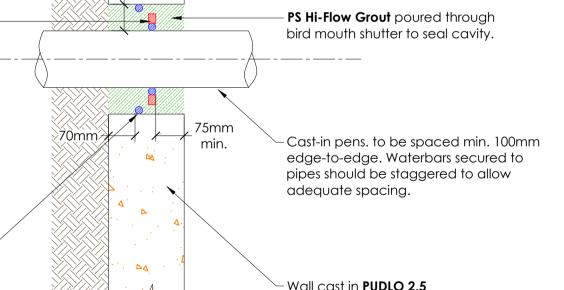

Modified Concrete.



DATE DESCRIPTION DB Group (Holdings) Ltd Wellington Way, Bourn Airfield

05/10/20 100mm penetration spacing note added.

Cambridge, CB23 2TQ Tel: +44 (0) 1954 780687 Email: sales@pudlo.com www.dbgholdings.com/pudlo

DRAWING TITLE PROJECT WALL PENETRATION POST-DRILLED DETAIL STATUS SCALE **FOR INFO**

1:10 on A4 DRAWING NUMBER REVISION PUDLO-TJD-P2.5-SS-012

CLIENT

18/12/19 First issue

COPYRIGHT: Not to be reproduced without written permission

1 of 1

A LD LL

REV. DES. Q.C.

LD LL